

CEMO

for safe storage


Clean. Compact. Capable.



The CUBE from CEMO.
Diesel, AdBlue®
or Lubricant Station.

Technical Data

CEMO CUBE-Tank

Description	Capacity l	External Dimensions cm (w x d x h)	Weight kg	Order No.
 CUBE-Tank, dispensing station for Diesel, Basic and Premium Comprising integral sump, optical bund alarm, tanker coupling, electronic overfill sensor, vent, analogue contents gauge, suction hose, 230v electric pump 56 l/min (72 l/min on 2500 l versions), 4 m delivery hose, automatic nozzle, integral nozzle holder, <u>fully assembled</u>				
<u>CUBE-Tank Indoor Basic, for diesel</u>	1500	120 x 115 x 174	165	10292
	2500	120 x 180 x 174	220	10293
<u>CUBE-Tank Outdoor Basic, for diesel</u> incl. hinged lid	1000	120 x 80 x 174	150	10294
	1500	120 x 115 x 180	180	10295
	2500	120 x 180 x 180	235	10296
<u>CUBE-Tank Outdoor Premium, for diesel</u> incl. hinged lid, K33 analogue flow meter, cartridge filter with water separator, hose reel with 8 m hose	1000	120 x 80 x 180	170	10297
	1500	120 x 115 x 180	200	10298
	2500	120 x 180 x 180	255	10299
<u>CUBE-Tank Extension Outdoor, for diesel</u> comprises Outdoor Basic package: with connection kit to first tank; excluding pump, hose, nozzle	2500	120 x 180 x 180	225	10300
 CUBE-Tank, dispensing station for AdBlue®, Basic and Premium Comprising integral sump, optical bund alarm, 2" dry tanker coupling, electronic overfill sensor, vent, analogue contents gauge, suction hose, 230v electric pump 35 l/min, 6 m delivery hose, automatic nozzle, integral nozzle holder, <u>fully assembled</u>				
<u>CUBE-Tank Indoor Basic, for AdBlue®</u>	1500	120 x 115 x 174	165	10301
	2500	120 x 180 x 174	220	10302
<u>CUBE-Tank Outdoor Basic, for AdBlue®</u> incl. hinged lid, insulation, heater ¹	1500	120 x 115 x 180	190	10303
	2500	120 x 180 x 180	250	10304
<u>CUBE-Tank Outdoor Premium, for AdBlue®</u> incl. hinged lid, insulation, heater ¹ , K24 digital flow meter, hose reel with 8 m hose	1500	120 x 115 x 180	205	10305
	2500	120 x 180 x 180	265	10306
<u>CUBE-Tank Extension Outdoor, for AdBlue®</u> comprises Outdoor Basic package ¹ : with connection kit to first tank; excluding pump, hose, nozzle	2500	120 x 180 x 180	235	10307
 CUBE-Tank, dispensing station for lubricants, Basic and Premium Comprising integral sump, optical bund alarm, tanker coupling, electronic overfill sensor, vent, analogue contents gauge, suction hose, 230v electric gear pump 9 l/min at 12 bar, 4 m delivery hose, nozzle with handheld digital flow meter, integral nozzle holder, <u>fully assembled</u>				
<u>CUBE-Tank Indoor Basic, for lubricants</u>	1000	120 x 80 x 174	140	10308
	1500	120 x 115 x 174	170	10309
<u>CUBE-Tank Indoor Premium, for lubricants</u> incl. hose reel with 15 m hose	1000	120 x 80 x 180	160	10310
	1500	120 x 115 x 180	190	10311
<u>CUBE-Tank Outdoor Premium, for lubricants</u> incl. hose reel with 15 m hose; hinged lid	1000	120 x 80 x 180	175	10312
	1500	120 x 115 x 180	205	10313

Further accessories on request.

¹ Winter Pack Mid-Europe: comprises insulation (floor and bund) and heater for ancillary area.



Technical specifications subject to change.

AdBlue® is a registered trademark of the German Automotive Industry Association.



Technical Data

CEMO CUBE-Tank

Description	Capacity l	External Dimensions cm (w x d x h)	Weight kg	Order No.
 CUBE-Tank, dispensing station for Diesel, Basic and Premium Comprising integral sump, optical bund alarm, tanker coupling, electronic overfill sensor, vent, analogue contents gauge, suction hose, 230v electric pump 56 l/min (72 l/min on 2500 l versions), 4 m delivery hose, automatic nozzle, integral nozzle holder, <u>fully assembled</u>				
<u>CUBE-Tank Indoor Basic, for diesel</u>	1500	120 x 115 x 174	165	10292
	2500	120 x 180 x 174	220	10293
<u>CUBE-Tank Outdoor Basic, for diesel</u> incl. hinged lid	1000	120 x 80 x 174	150	10294
	1500	120 x 115 x 180	180	10295
	2500	120 x 180 x 180	235	10296
<u>CUBE-Tank Outdoor Premium, for diesel</u> incl. hinged lid, K33 analogue flow meter, cartridge filter with water separator, hose reel with 8 m hose	1000	120 x 80 x 180	170	10297
	1500	120 x 115 x 180	200	10298
	2500	120 x 180 x 180	255	10299
<u>CUBE-Tank Extension Outdoor, for diesel</u> comprises Outdoor Basic package: with connection kit to first tank; excluding pump, hose, nozzle	2500	120 x 180 x 180	225	10300
 CUBE-Tank, dispensing station for AdBlue®, Basic and Premium Comprising integral sump, optical bund alarm, 2" dry tanker coupling, electronic overfill sensor, vent, analogue contents gauge, suction hose, 230v electric pump 35 l/min, 6 m delivery hose, automatic nozzle, integral nozzle holder, <u>fully assembled</u>				
<u>CUBE-Tank Indoor Basic, for AdBlue®</u>	1500	120 x 115 x 174	165	10301
	2500	120 x 180 x 174	220	10302
<u>CUBE-Tank Outdoor Basic, for AdBlue®</u> incl. hinged lid, insulation, heater ¹	1500	120 x 115 x 180	190	10303
	2500	120 x 180 x 180	250	10304
<u>CUBE-Tank Outdoor Premium, for AdBlue®</u> incl. hinged lid, insulation, heater ¹ , K24 digital flow meter, hose reel with 8 m hose	1500	120 x 115 x 180	205	10305
	2500	120 x 180 x 180	265	10306
<u>CUBE-Tank Extension Outdoor, for AdBlue®</u> comprises Outdoor Basic package ¹ : with connection kit to first tank; excluding pump, hose, nozzle	2500	120 x 180 x 180	235	10307
 CUBE-Tank, dispensing station for lubricants, Basic and Premium Comprising integral sump, optical bund alarm, tanker coupling, electronic overfill sensor, vent, analogue contents gauge, suction hose, 230v electric gear pump 9 l/min at 12 bar, 4 m delivery hose, nozzle with handheld digital flow meter, integral nozzle holder, <u>fully assembled</u>				
<u>CUBE-Tank Indoor Basic, for lubricants</u>	1000	120 x 80 x 174	140	10308
	1500	120 x 115 x 174	170	10309
<u>CUBE-Tank Indoor Premium, for lubricants</u> incl. hose reel with 15 m hose	1000	120 x 80 x 180	160	10310
	1500	120 x 115 x 180	190	10311
<u>CUBE-Tank Outdoor Premium, for lubricants</u> incl. hose reel with 15 m hose; hinged lid	1000	120 x 80 x 180	175	10312
	1500	120 x 115 x 180	205	10313

Further accessories on request.

¹ Winter Pack Mid-Europe: comprises insulation (floor and bund) and heater for ancillary area.

Technical specifications subject to change.

AdBlue® is a registered trademark of the German Automotive Industry Association.

CEMO GmbH
In den Backenländern 5
D-71384 Weinstadt
Tel. +49 7151 9636-0
Fax +49 7151 9636-98
kontakt@cemo.de
www.cemo.de

To see our full range of refuelling
solutions, please visit our website:
www.cemo.de/tankstationen.html
or call us to request a catalogue:
Tel. +49 7151 9636-0
Fax +49 7151 9636-98



CEMO CUBE – a new generation. Redefining the Standard³.

The majority of fuel stations have been adapted from oil storage tanks and often give the appearance of being cobbled together as best as possible. Perhaps now is the time to redesign from scratch and produce a purpose

designed fuel station more closely suited to today's user. CEMO present the latest in security, function and design in the CUBE. We have introduced features with benefits, not compromises and jigs. The first dispensing station to be

designed as a dispensing station, whether for diesel, AdBlue® or lubricants, with everything in its place, easily accessible and straightforward to use. It's impressive – a great concept. Take a look and see if you agree.



The clever solution
for easy handling.



Diesel CUBE 2500

Lube CUBE 1000

Blue CUBE 1500



2" dry coupling,
230V electric
membrane pump
35 l/min and
automatic nozzle
for AdBlue®



230V electric
gear pump
9 l/min at
12 bar with
digital handheld
flow meter for
lubricants

The One Dispensing Station that Has it All

✓ Always tidy

The automatic hose reel helps you keep 8m of hose in order.

✓ Sensible layout

Integrated nozzle holder keeps things in place.

✓ Ergonomic

All equipment is positioned so that it is easy to see and access at an optimum level over the bund.

✓ Double protection

Integral 110 % bund gives added environmental protection.

✓ Transport-friendly

Integral forklift runners assist with loading and installation. Optimal dimensions based around Europallet measurements for ease of transport and delivery to site.

✓ Robust, lockable lid

Lockable lid secured by toggle latches. Opens upwards on supporting gas struts to allow access from three sides and plenty of light to see what you're doing.

✓ Designed-in stability

Two systems ensure stability – moulded hexagonal matrix for integral polymer strength, supported by twin steel bands at the points of greatest load. Reduces movement and increases service life.

✓ Independently tested

Ü-mark shows compliance with German building standards that insist on a minimum 25-year service life, full load bearing capacity and 30 minutes fire resistance. CE-mark shows compliance with BS EN 13341:2005+A1:2011 standard for above-ground polyethylene oil tanks.



always tidy




sensible layout



ergonomic



double protection

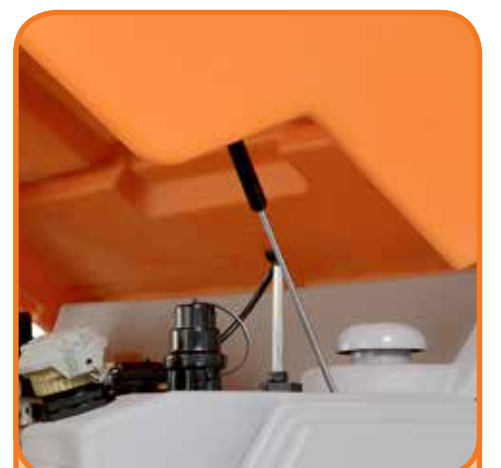

robust, lockable lid



open on all sides



designed-in stability



transport-friendly